

Brush Cutter

For skid-steer loaders.



PALADIN LIGHT CONSTRUCTION

FEATURES:

- 60", 72" & 78" heavy-duty deck widths with heavy duty optional foam filled caster wheel to fit most extreme applications
- High flow and standard flow available
- Heavy-duty 1/4" thick high strength steel deck with formed stiffened side plates and heavy-duty skid shoes for added strength and rigidity
- Motor options for 25-40 GPM flow with internal relief for drive system protection and fast controlled shut down
- High-speed, dual rotation blades, for brush and small trees up to 4" in diameter (blade options available)
- Stump jumper for ease of operation and gear box protection
- 1 year warranty




optional caster wheel



Brush Cutter



- Heavy-duty brush cutter offers easy maintenance with access ports and hinged shrouding
- The high deck clearance and smooth unobstructed deck design prevents debris from building up & improves overall performance
- High-speed, dual rotation blades for brush & small trees up to 4"
- Includes exclusive blade stall indicator to warn the operator of overload conditions (see below)
- Blade options include a heavier single-edge curved blade or a double-edge blade for maximum performance
- Features include output shaft seal protection, side discharge with flow control baffle and lift limiting retention chain



Blade Stall Indicator

Specifications	60"	72"	78"
A. Overall Height	22.50"	22.50"	22.50"
B. Overall Length	78.00"	90.00"	96.00"
C. Minimum Cutting Height (skid shoes on ground)	2.00"	2.00"	2.00"
D. Deck Height	9.00"	9.00"	9.00"
E. Cutting Width	60.00"	72.00"	78"00"
F. Overall Width	72.00"	85.00"	91.00"
Cutting Capacity (maximum cutting diameter)	4.00"	4.00"	4.00"
Deck Thickness	¼" steel	¼" steel	¼" steel
Recommended Skid-Steer Hydraulic GPM	15 to 30	18 to 40	32 to 40
Required Skid-Steer Lift Capacity (lbs)	1300	1700	1800
Weight (lbs)	1230	1610	1666

Typical Blade Tip Speed (ft/min.)	60"	60"	72"	72"	78"
Flow (GPM)	15-20	25-30	18-22	32-40	32-40
18 GPM	18,540				
28 GPM		15,820			
20 GPM			16,810		
37 GPM				17,380	18,820

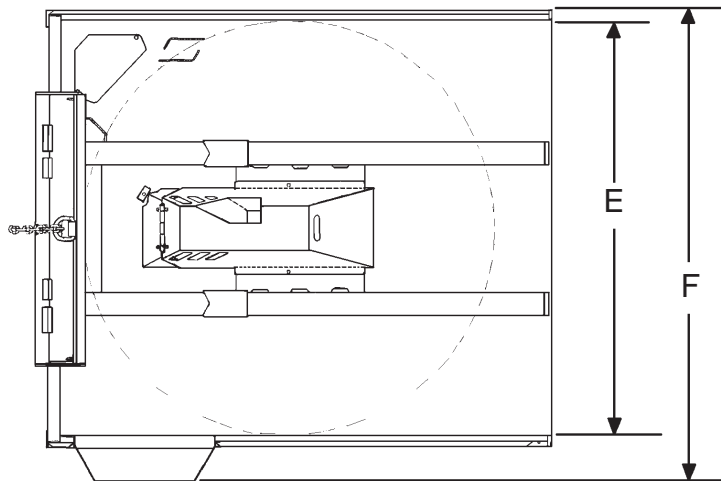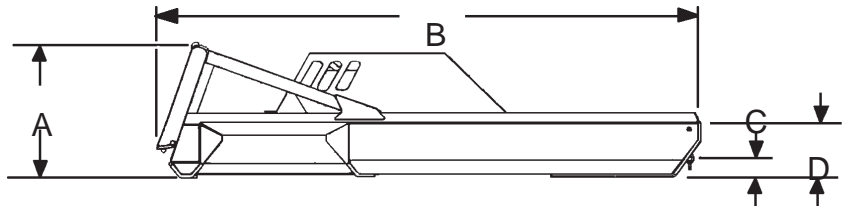

Specifications and design are subject to change without notice and without liability therefore. Whenever applicable, specifications are in accordance with SAE standards.

PH: (800) 922-2981
FX: (563) 922-2700

P.O. Box 266
Delhi, IA 52223-0266
United States of America

www.paladinbrands.com

B-Brush Cutter 0711-4



PALADIN LIGHT CONSTRUCTION